

pynode⁺ air

Specsheet
draft 1.0

1.0	Overview	03
2.0	Features	03
3.0	Specifications	04
3.1	DA14531 - SmartBond TINY™	04
3.2	Digital Humidity Sensor SHTC3	04
3.3	Battery	04
4.0	Pynode+ air Size	05
4.1	Diagram	05
5.0	Power Consumption	06
6.0	Ordering Information	06
7.0	Revision History	06



1.0 Overview

Bluetooth® Low Energy (BLE) 5.1 temperature and humidity sensor featuring Dialog Semiconductor DA14531 for BLE 5.1 and Sensirion SHTC3 Temperature & Humidity sensor. the Pynode+ air is a BLE enabled sensor that connects seamlessly to your Pycom's WiPy, GPy, LoPy4, FiPy, OEM module or any other device that runs BLE 5.1.

2.0 Features

- BLE: Dialog Semiconductor DA14531 - SmartBond TINY™
- Sensor: Digital Humidity Sensor SHTC3 (RH/T)

3.0 Specifications

3.1 DA14531 - SmartBond TINY™

- Low Power Bluetooth 5.1 system-on-chip
- 16 MHz 32-bit Arm® Cortex-M0+
- Compatible with Bluetooth v5.1, ETSI EN 300/328 and EN 300 440 Class 2 (Europe), FCC CFR47 Part 15 (US) and ARIB STD-T66 (Japan)
- TX: 3.5 mA, RX: 2.2 mA (system currents with DC-DC, VBAT_HIGH =3 V and 0 dBm)

3.2 Digital Humidity Sensor SHTC3

- Humidity and Temperature Sensor IC
- Ultra-low power consumption
- Typical accuracy: $\pm 2\%$ RH and $\pm 0.2\text{ }^{\circ}\text{C}$
- Power-up and measurement within 1 ms

3.3 Battery

- Panasonic CR2032 LITHIUM 3V COIN 20mm

Table 1 – Power consumption by feature

Nominal Voltage(V)	3.0
Nominal Capacity(mAh)	225.00
Continuous Standard Drain(mA)	0.2000
Maximum Pulse Discharge Current(A)	-
Diameter(mm)	20.0
Thickness(mm)	-
Hight(mm)	3.2
Weight(Approx.)(g)	2.80
Operating Temperature) (C°)	-30 - +85
Type	CR coin
JIS	CR2032
IEC	CR2032
IEC 60086-4	Certified
UL1642	Certified

4.0 Pynode+ air Size


Diameter: 30mm

Height: 7.62mm

Weight: 3g (excl. battery and 6g (incl. battery)

Weight in packaging: 21g

4.1 Diagram

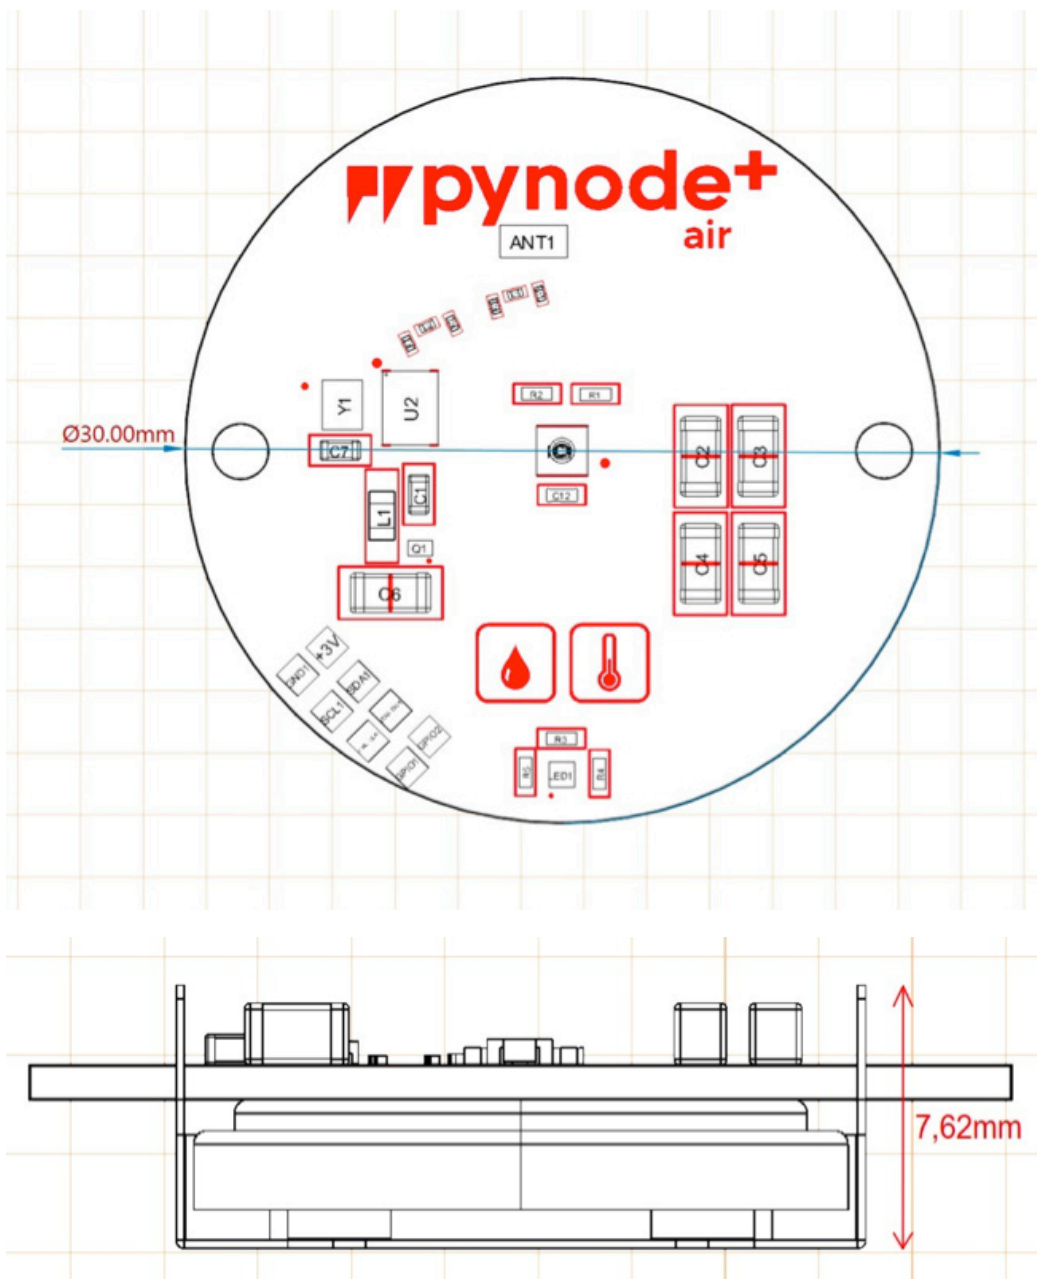

5.0 Power Consumption

- Central role for initial configuration: avg: 446uA and max: 1.67mA
- Peripheral & Advertising mode (1minute sleep timer): avg: 7.16uA and max: 1.00mA

6.0 Ordering Information

For pre-orders or to discuss supply please contact sales@pycom.io quoting pynode+ air

7.0 Revision History

Table 2 – Document revision history

Version	Initial Release
Draft 1.0 first draft release	06SEPT2021